

**EGS257 BESS Cabinet**
**datasheet**
**· Category:**

Liquid Cooling BESS Cabinet

**· Application:**

Remote Area, EV Station, Industrial &amp; Commercial, Residential, Frequency Regulation, Power Station

**· Benefits:**

Enhanced Grid Reliability and Resilience, Cost Savings, Environmental Benefits, Energy Independence, Improved Power Quality, Scalability and Flexibility, Support for Electrification


**· Hardwares:**

Packs, BMS, HV Box, PCS, PDU, FFS, EMS Controller Set, Enclosed Cabinet

**· Software:** BMS, EMS

**· Cloud Platforms:** Renepoly Cloud

**· Data Sheet:** EGS257 Cabinet Datasheet

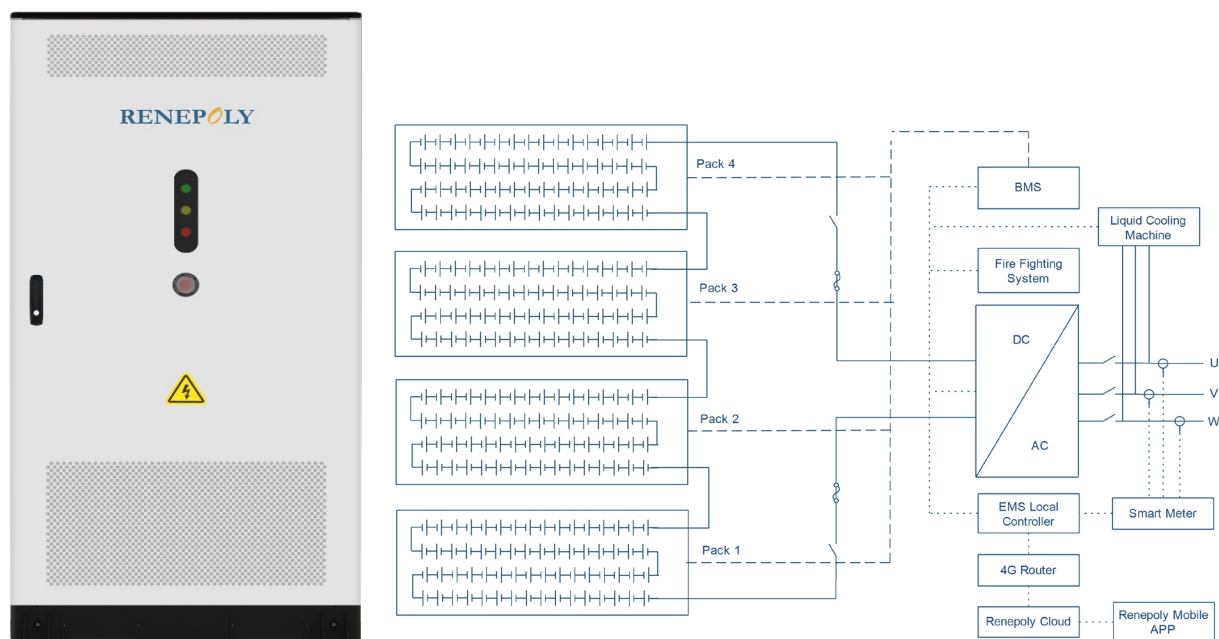**· User Manual:** EGS257 Cabinet User Manual


Technical Parameters	European Version
<b>AC Side (Grid Tied Scenario)</b>	
AC Output Power	125kW @ 45°C
Max. AC Output Power	135kW
Nominal AC Voltage / Range	230V/400V
Nominal Grid Frequency/Range	50/60Hz
Harmonic(THD)	<3% (at Nominal Power )
Power Factor at Nominal Power/Adjustable	-1 ~ 1
Cooling Concept of PCS Chamber	Air Cooling
Seamless Switching from Grid to BESS In Case of Power Outage	Optional
<b>AC Side (Microgrid Scenario)</b>	
Nominal AC Voltage	230V/400V
Harmonic (THD)	< 2% (Resistance Load)
Nominal Frequency/Range	50/60Hz
Max. AC Power	137.5kW
<b>Batteries</b>	
Nominal Battery Voltage	819.2VDC
Battery Type	LiFePO4 3.2V/314Ah
Battery Pack Configuration	1P64S/64.3024kWh
Battery System Configuration	1P256S
Capacity	257.2288kWh
Battery Voltage Range	716.8-921.6VDC
Max Output Power	135kw
Battery Disconnect	Integrated
Cooling concept of battery chamber	Liquid Cooling
<b>General Parameters</b>	
Dimension W*D*H	1050*1600*2050mm
Charge/Discharge Rate	0.5C
Depth of Discharge	95%
Life Cycle	6000
Degree of Protection	IP55
System Efficiency	~91% (Without Auxiliary Equipment Energy Consumption)
Cooling Liquid	50% Ethylene glycol+50% Water
Fire Protection System	Aerosol
Allowed Ambient Temperature	-30 ~ 60°C (>45°C Derating)
Allowed Relative Humidity	0 ~ 95%
Working Altitude	<2000m
Enclosure Corrosion Resistance Level	C3 (C4/C5 Optional)
Weight	~3200kg
SPD	DC TYPE II/AC TYPE II
Lifting Options	Fork/Crane
Scalability	Yes, Units Can Be Connected In Parallel
<b>Monitoring</b>	
Display	7 Inches Touchscreen
Communication	RS485/Ethernet
Communication Protocols	MODBUS-RTU/MODBUS-TCP
Remote Control System	Renepoly Cloud
<b>Certifications</b>	
Battery Cell	CE, RoHS, UN38.3, MSDS, UL, ESG
Battery Pack	CE, UL, UN38.3, MSDS
Battery Rack	CE, UL, UN38.3, MSDS
Power Conversion System	IEEE 1547, UL 1741 SB
Whole Unit	CE, UN38.3, MSDS, UL 9540, UL 9540A, UL1973, FCC PART 15 B, UL 60730, IEEE 1547, UL 1741 SB

Add: U3 Building, No.6 Lianpu Street, Huangpu District, Guangzhou, China

Tel: +86 (020)31800796 Email: Info@renepoly.com

<https://www.renepoly.com>

# The three components of the RENEPOLY Battery Energy Storage System

**BESS cabinet / BESS Container, Energy Management System and ReneCloud / ReneApp & energy services**



## 1.BESS cabinet / BESS Container

A business that generates and uses its own energy is well on the way towards independence.

In trades, gastronomy or agriculture – whatever your line of business, RENEPOLY battery storage systems reduce your dependence on energy suppliers and make you less vulnerable to price fluctuations and interruptions in supply.

Interested in RENEPOLY BESS Products?

Simply scan the QR code to subscribe and access all the info you need about our products and special offers.



## 2.Microgrid Energy Management System

Energy flows can be recorded, controlled and monitored with the innovative RENEPOLY energy management system – consisting of the RENEPOLY Energy Manager System cabinet and the ReneCloud portal.

Want to explore renewable energy sources further?  
In a hurry? Book a meeting with us now—just scan the QR code right now.  
We can provide a free analysis and tailored one-stop solutions based on your needs.  
Looking forward to seeing you there!



## 3.ReneCloud / ReneApp and energy services

By setting individual operational strategies, you can combine a wide variety of applications and thus perfectly adapt the system to the needs of commerce and industry.


Curious about ReneCloud?  
Scan the QR code right now, register for a test account, and explore all the features of our energy management solution at your own pace. And if you need any help, we're happy to assist!



ReneCloud



APP Android download



ReneApp

This data sheet is strictly informational and is not legally binding. The exact specifications and/or product features (particularly in case of further development of the products) may differ somewhat from the information provided here.  
Subject to errors and changes. Please read the safety and installation instructions carefully and completely before using the product. In case of purchase, the currently valid guarantee policies and the general terms and conditions of delivery and business of RENEPOLY apply.

Add: U3 Building, No.6 Lianpu Street, Huangpu District, Guangzhou, China

Tel: +86 (020)31800796 Email: [Info@renepoly.com](mailto:Info@renepoly.com)

<https://www.renepoly.com>